


CABINET LEGEND (ORIGINAL)					
CODE	QTY	DESCRIPTION	CODE	QTY	DESCRIPTION
B24	1	Base Cabinet: width = 24-inches, height = 34.5-inches, depth = 24-inches	VS253218	1	Vanity Sink Base: width = 25-inches, height = 32-inches, depth = 18-inches
B42	1	Base Cabinet: width = 42-inches, height = 34.5-inches, depth = 24-inches	W1242	1	Wall cabinet: width = 12-inches, height = 42-inches, depth = 12-inches
BF	1	Base Filler: width = 4-inches, height = 34.5-inches, depth = $\frac{3}{8}$ -inch	W1842	2	Wall cabinet: width = 18-inches, height = 42-inches, depth = 12-inches
LSB17	2	Lazy Susan Base cabinet: 17-inch front, height = 34.5-inches	W2442	1	Wall cabinet: width = 24-inches, height = 42-inches, depth = 24-inches
OC339024	1	Oven Cabinet: width = 33-inches, height = 90-inches, depth = 24-inches	W3624	2	Wall cabinet: width = 36-inches, height = 24-inches, depth = 12-inches
PC309024	1	Pantry cabinet: width = 30-inches, height = 90-inches, depth = 24-inches	WDC1742	1	Wall diagonal cabinet: width = 17-inches, height = 42-inches, depth = 12-inches
SB33	1	Sink Base cabinet: width = 33-inches, height = 34.5-inches, depth = 24-inches	GBB60	1	Granite Breakfast Bar Base: width = 60-inches, height = 34.5-inches, depth = 24-inches

GENERAL NOTES	
ID	DESCRIPTION
GN20	Window on North kitchen wall removed due to privacy concerns. Former owners did warn us to keep window covered for same reason.
GN21	Upstairs bedrooms had no ceiling light. All had one outlet controlled by switch.
GN22	Upstairs bathrooms had no ceiling light(s), no exhaust, no humidity sensors.
GN23	Original oak floor remains below 3/8 in. enengineered bamboo click. Kitchen tile removed.
GN24	Gas shutoff valve on south wall for stove top hidden within lower cabinets.
GN25	Gas shutoff valve on north wall hidden within oven cabinet. A second gas shutoff embedded in exterior stucco wall.
GN26	Outlet for SEH hidden/floating in cabinet above stove top.

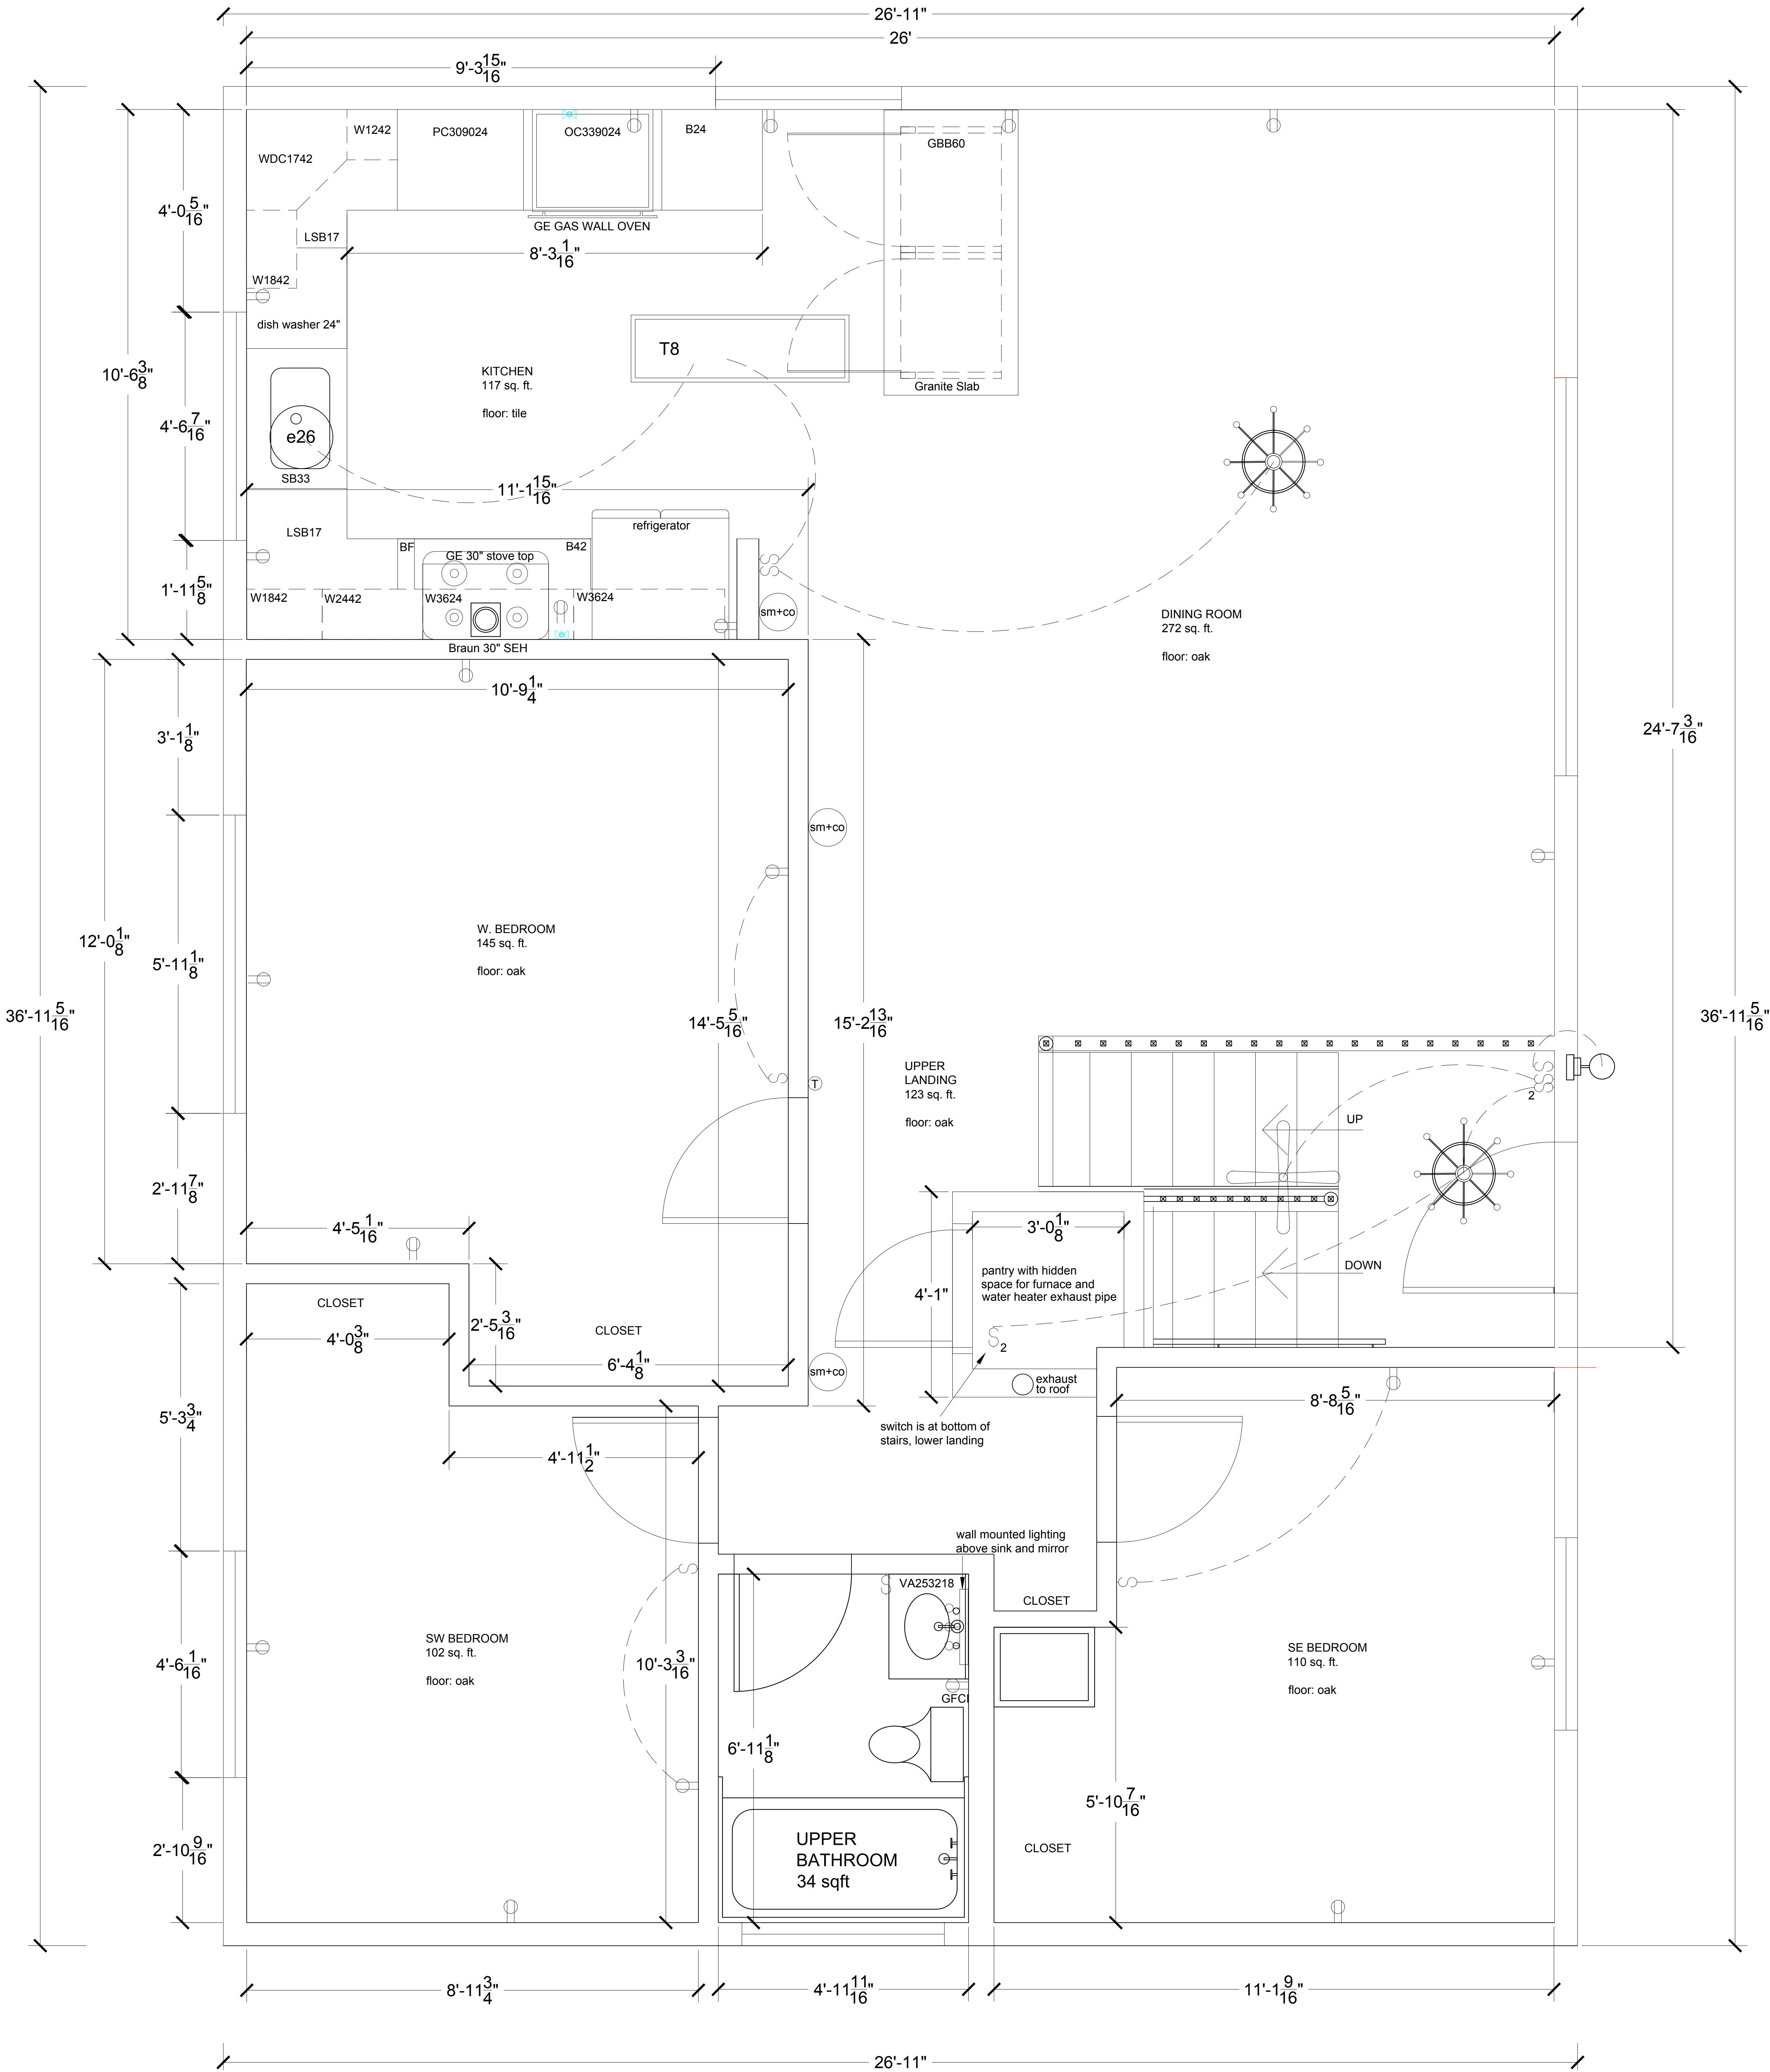

DRAWING TITLE:

Original 2nd Floor Plan

PROJECT TITLE

4431 Amador Rd.
Fremont, CA 94538

DATE: 12/31/2024

Model Space Scale: 1:1
Paper Space Scale: 3/4" = 1'-0"

Drawn By: ES
Revision: 5

COMPANY: Home Owners

Yang Fu
angela.fuyang@gmail.com
+1 (510) 358-6728

Ernest Schleicher
ernest.schleicher@gmail.com
+1 (510) 358-6729

NOTES:

SHEET NO.

A-108