


GENERAL NOTES	
1	The red polyline defines a 512 sq. ft. ceiling area that includes the kitchen, dining area, upper landing, front entrance (vestibule) and the towel closet.
2	The 117.5 sq. ft. kitchen area was calculated arbitrarily using the 11.16145 ft east-to-west value multiplied by the 10.53125 north to south value shown in the dimensions.
3	The 278 sq. ft. dining area was calculated arbitrarily by subtracting the 11-ft east-to-west value of the kitchen from the 25.98958-ft total width of the north wall and multiplying that 14.8281 ft. distance by 18.73958 ft. (from north wall to stairwell)
4	The area of the upper landing was calculated by subtracting the sum of the kitchen and dining area (396.3724 sq. ft.) from the 512 sq. ft. defined by the polyline.

Reflected Ceiling Plan Legend		
Room	Device IDs	Description
Kitchen	26, 27, 28, 45	(3) 15-in. LED ceiling lights and switch 45
Dining Room	29, 30, 31, 32, 33, 34, 35, 46, 222	(7) 15-in. LED ceiling lights and switch 46, and First Alert Smoke+CO model SMC0500V 222
Front Entrance	88	E26 Pendant Light with LED light bulb
SE Bedroom	57, 56, 224	11-in. LED ceiling light, switch 56, and First Alert Smoke+CO model SMC0500V 224
Upper Bathroom	62, 63, 60, 61, 58	(2) 7.5-in. wet rated LED ceiling lights, humidity sensor, 80 cfm exhaust unit, motion switch 58
SW Bedroom	73, 64, 223	11-in. LED ceiling light, switch 64, and First Alert Smoke+CO model SMC0500V 223
W Bedroom	83, 79, 221	15-in. LED ceiling light, switch 79, and First Alert Smoke+CO model SMC0500V 221
Upper Landing	220	First Alert Smoke+CO model PC1210

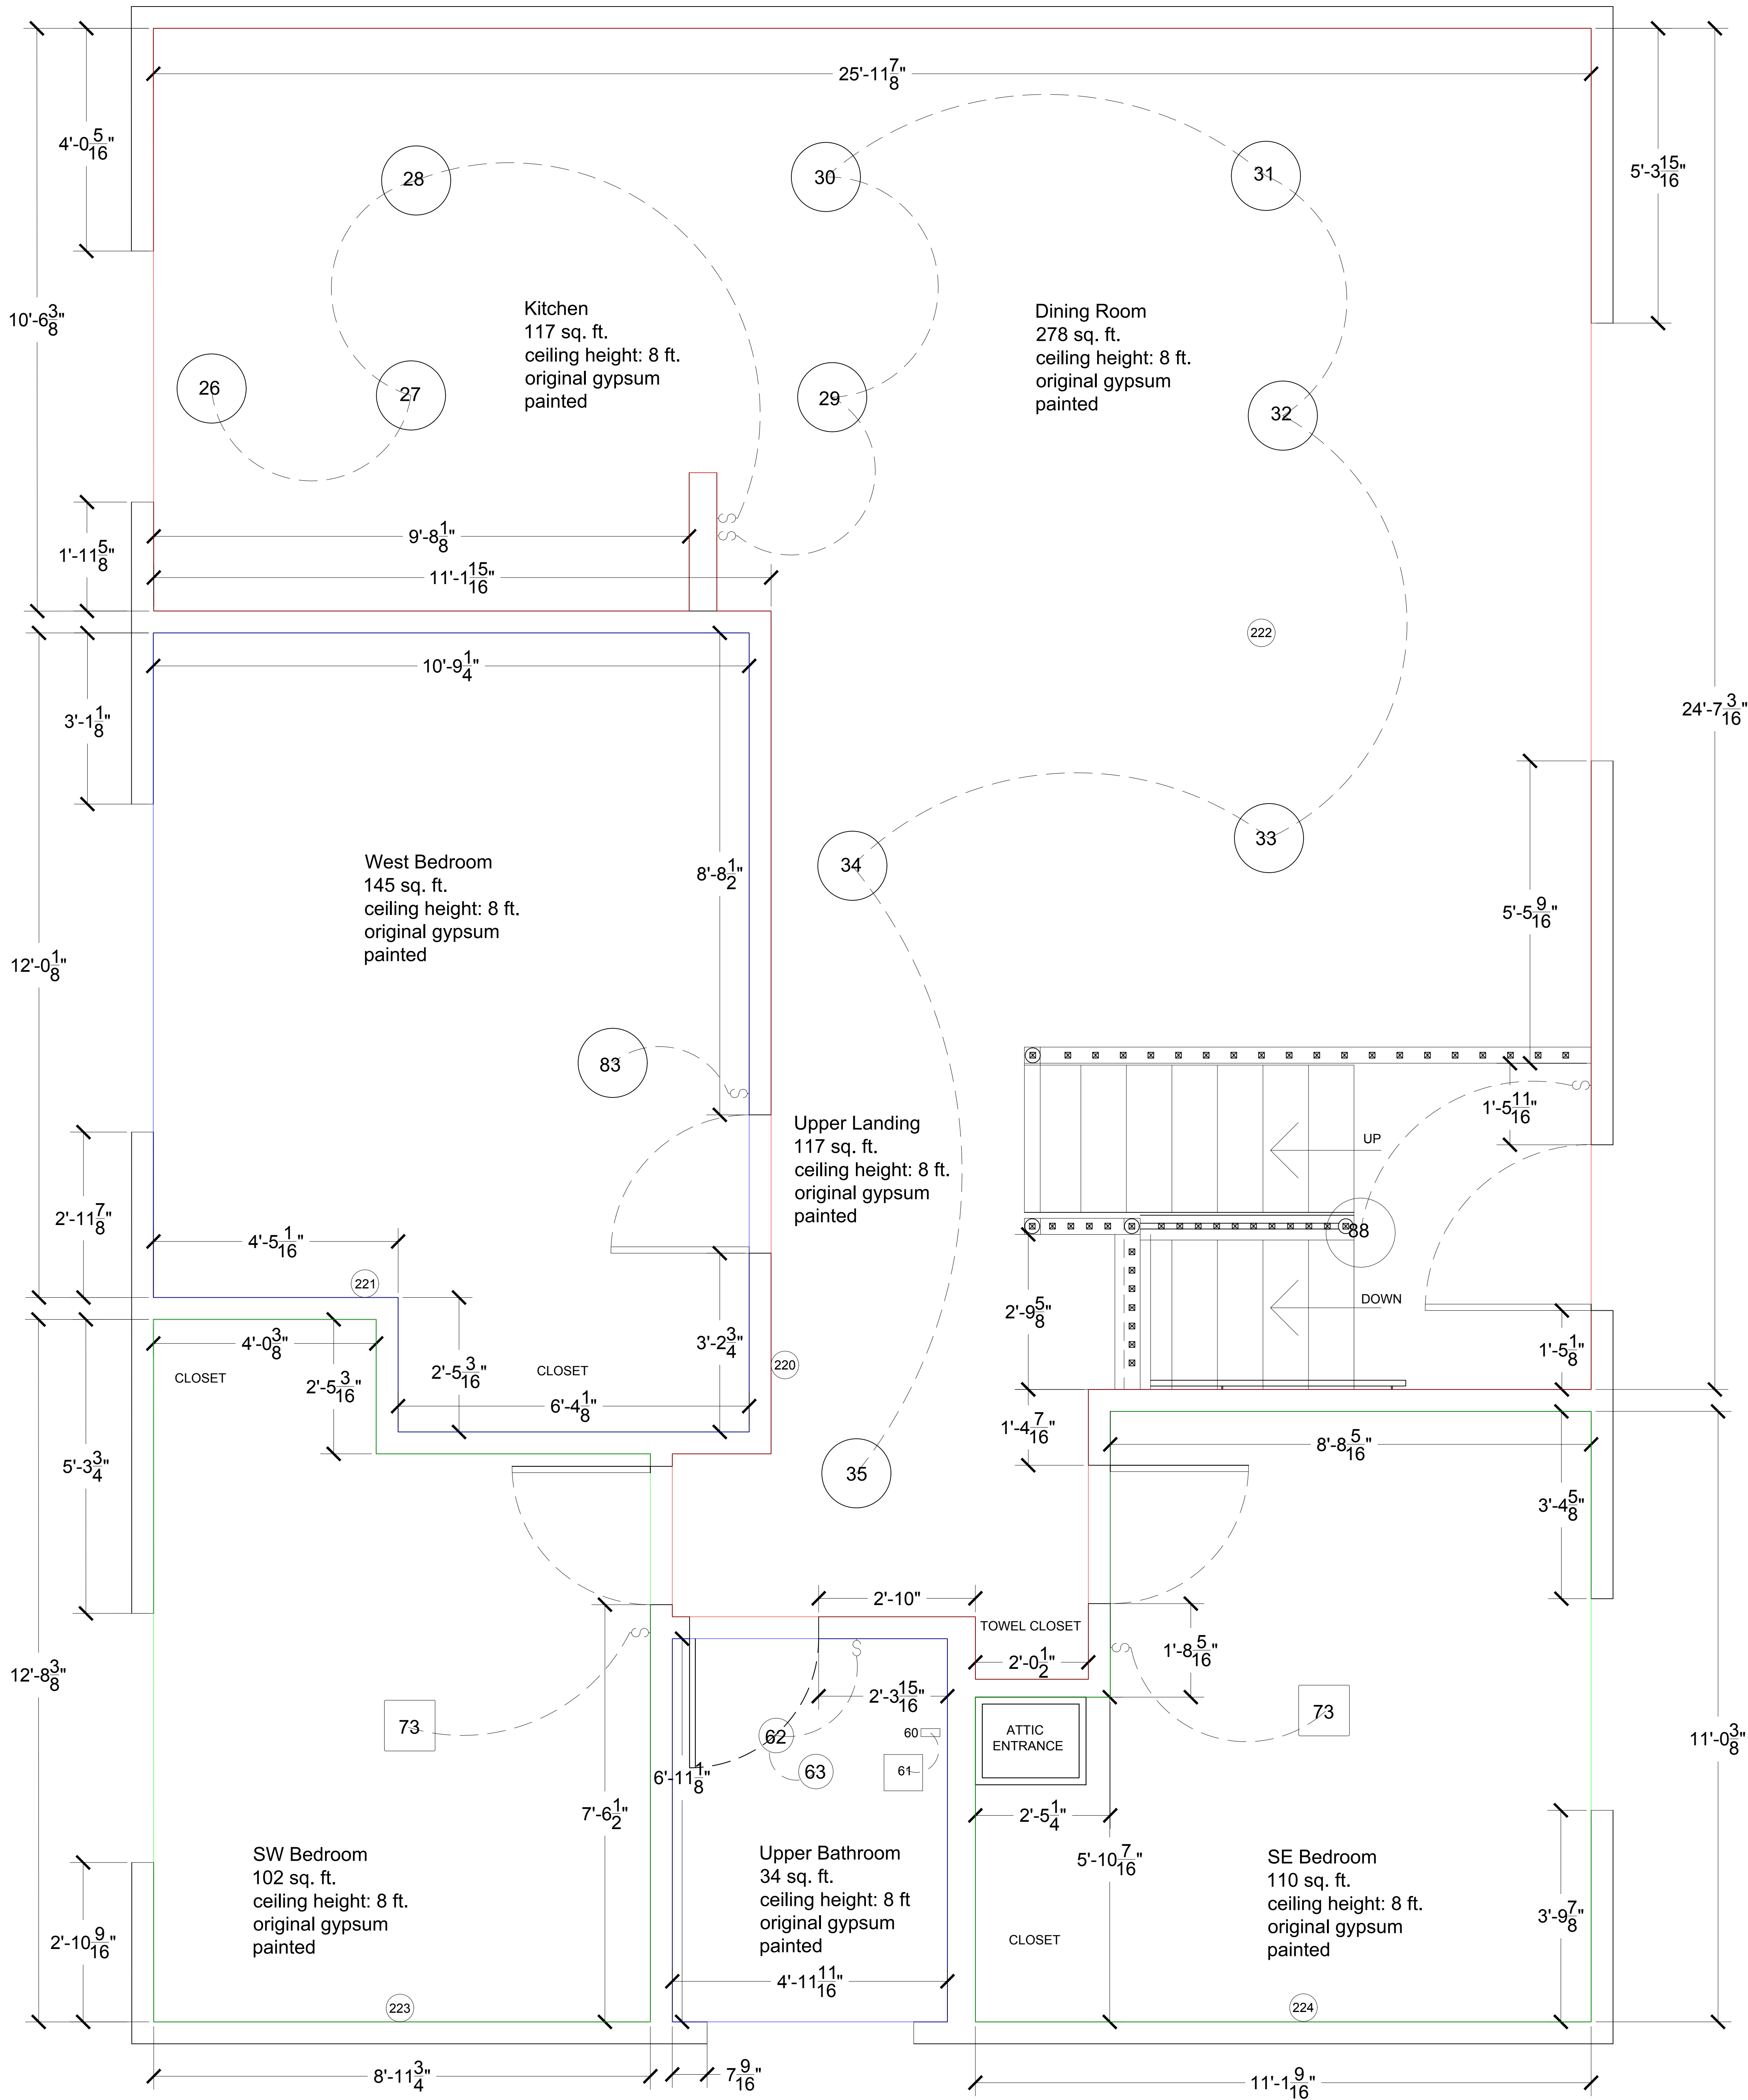

DRAWING TITLE: Current 2nd Floor Reflected Ceiling Plan	PROJECT TITLE: 4431 Amador Rd. Fremont, CA 94538	DATE: 12/17/2024 Model Space Scale: 1:1 Paper Space Scale: 3/4" = 1'-0" Drawn By: ES Revision: 5	COMPANY: Home Owners Yang Fu angela.fuyang@gmail.com +1 (510) 358-6728 Ernest Schleicher ernest.schleicher@gmail.com +1 (510) 358-6729	NOTES:	SHEET NO. A-104
--	--	--	--	--------	------------------------